

ADBI2445S

24" Stainless Tall Tub

DISHWASHER

GENERAL CHARACTERISTICS

Wash cycles	5 (Auto, Heavy, Normal, 1H Wash, Rapid pro 45 minutes)
Drying cycle	Triple-action drying
Wash options	7 - Steam / Sanitize / Hi Temp / Heat dry / Upper Zone / Lower Zone / Delay start(1-24h)
Wash zone option	3 (Upper, lower or both)
Fresh storage	96-hour fresh storage mode keeps the tub odour-free for up to 4 days
User interface	Hidden top-control LED panel
Place settings	16
Third rack	Full size
Upper rack	Adjustable / fold tine / wine glass support
Lower rack	Standard
Silverware basket	Yes
Heating element	Exposed
Leak protection	Yes
Spray arms	3
Floor lighting	Yes
Interior lighting	Yes


SPECIFICATIONS AND DIMENSIONS

Dimensions	24.5" W x 23.75" D x 33.75" H
Handle	NOVA TRAZO
Door	Stainless finish
Tub Material	Stainless Steel
Kickplate	Black metal
Sound Rating	45 dBA
Certifications	ENERGY STAR®
Electrical Requirements	120V~60Hz 15A
Electrical cord included	No
Warranty	2-year parts & labour
UPC Code	628173081819



ADBI2445S 24" Stainless Tall Tub DISHWASHER

DIMENSIONS

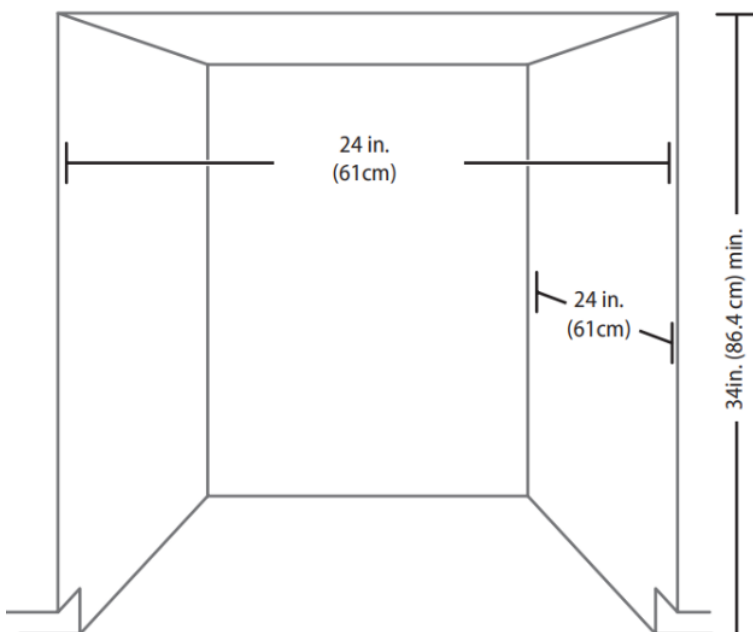

Enclosure requirements

- The dishwasher includes a drain hose. If you are installing this dishwasher with a different drain hose, make sure that the drain hose is no more than 10 ft (3.01 m) in length, for proper drainage.
- The dishwasher is designed to be enclosed on the top, both sides, and back by a standard residential kitchen cabinet unit.
- The installation enclosure must be clean and free of any obstructions.
- The rough cabinet opening must be at least 24 in. (61 cm) deep and 34 in. (86.4 cm) high.
- For the front door of the dishwasher to be flush with the front edge of the countertop, the countertop must be 25 in. (63.5 cm) deep.

CLEARANCES

If installing into a corner, allow 2 in. (5.08 cm) min. clearance between the dishwasher and the adjacent cabinet, wall, or other appliances.

Allow 27 2/5 in. (69.5cm) clearance from the front of the dishwasher for opening the door

