



<i>EAN code</i>	8034122370323
<i>Model Code</i>	FIVAL34B6SS-R Built-in - 34" (87 cm) - inox - 600 CFM
<i>Collection</i>	Built-in

FEATURES AND PROPERTIES

<i>Materials/Finishes</i>	Scotch brite stainless steel (AISI 304)
<i>Lighting</i>	Strip LED Dynamic Light (2700K - 5600K)
<i>Control</i>	Electronic control
<i>Installation type</i>	Insert
<i>Ducting type</i>	External ducting/Recirculating
<i>Filters</i>	Metallic grease filter, removable and washable Charcoal filter (optional)
<i>*Chimney</i>	Possible to duct wall mounted from rear
<i>Dimensions</i>	34 in
<i>Features</i>	Perimeter suction Possible to duct wall mounted from rear SRS Speed reduction system

OPTIONAL ACCESSORIES

Code	Description
103050091	FFCHAR3COBL - Round charcoal filter Ø 6" - Type 6
101080141	Metallic filter aluminium base (Valentina Ins. 87) 239x190,3
105080053	Remote control
KACL.815	Protective cleaning cloths for stainless steel (box 10 pcs)

ELECTRICAL CONNECTION AND CONSUMPTION

Maximum consumption 340W
 Voltage/Frequency 110-120V 60Hz
 Connection type Hood comes standard with Nema 5-15P power cord

BLOWER PERFORMANCE

Motor 600 CFM


TECNICAL SPECS OF COOKERHOOD WITH 600 CFM MOTOR

Motor Speed	SRS 2*		SRS 3*	
	1	2	3	4
CFM (rated at the motor)	210	295	395	600
Sones (estimated value)	1.5	3	4.25	6
Duct Size	6"	6"	6"	6"

*If activated SRS has 2 settings; 3 speed max & 2 speed max


WEIGHTS AND DIMENSIONS

Gross weight 38 lbs
 Net weight 31 lbs
 Packaging dimensions L 39 in H 15 in D 16 in
 Notes Recommended mounting height from cooking surface to hood bottom: 24" - 35"

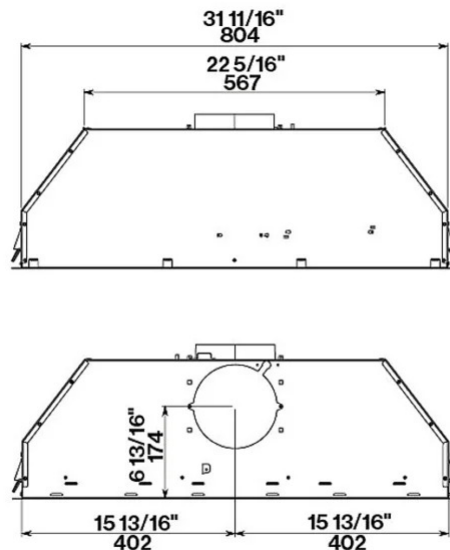


Bottom view

Frontal/rear view

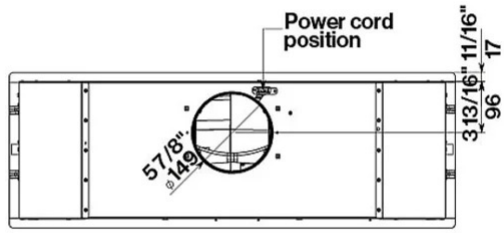

Top view



Side view